



CYCLE PARKING PLANNING AND DESIGN

Cycling Network Guidance technical note

1 MAY 2019

Copyright information

Copyright ©. This copyright work is licensed under the Creative Commons Attribution 4.0 International licence. In essence, you are free to copy, distribute and adapt the work, as long as you attribute the work to the NZ Transport Agency and abide by the other licence terms. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

Disclaimer

The NZ Transport Agency has endeavoured to ensure material in this document is technically accurate and reflects legal requirements. However, the document does not override governing legislation. The NZ Transport Agency does not accept liability for any consequences arising from the use of this document. If the user of this document is unsure whether the material is correct, they should refer directly to the relevant legislation and contact the NZ Transport Agency.

More information

NZ Transport Agency
Published May 2019 (version 2, November 2019)

If you have further queries, call our contact centre on 0800 699 000 or write to us:

NZ Transport Agency
Private Bag 6995
Wellington 6141

This document is available on the NZ Transport Agency's website at <http://www.nzta.govt.nz>

Keywords

bicycle, tricycle, e-bike, cargo bike, cycle, parking, multi-modal

Acknowledgements

The guidance was compiled by ViaStrada Limited (project lead, John Lieswyn), Abley Limited, and Bikes Welcome Incorporated, with peer review by the Active Modes Infrastructure Group.

Contents

1	Introduction	4
1.1	Why cycle parking?	4
1.2	Key steps in cycle parking provision.....	5
2	Planning guidance	6
	Basic planning principles	6
3	Cycle stands	7
3.1	Six key design requirements.....	7
3.2	Preferred stand type: the inverted U or hoop	7
3.3	Acceptable alternative stand types	8
3.4	Unacceptable stand types	10
3.5	Materials and specifications.....	11
4	Layout and design	12
4.1	Location of cycle parking	12
4.2	Site design: spacing and layout.....	13
4.3	Parklets and cycle corrals.....	15
4.4	Covered cycle parking	15
4.5	Lockers	15
4.6	Enclosures and indoor parking	16
4.7	Signage.....	17
4.8	Lighting	17
4.9	Complementary end-of-trip facilities	18
4.10	School cycle parking.....	18
5	Management and maintenance	20
6	References.....	21
	Appendix 1: Example district plan cycle parking and end of trip facility requirements	22

1 INTRODUCTION

This document summarises best practice provision of parking and end-of-trip facilities for people who cycle. This augments advice in the Cycling Network Guidance [1]. Note that New Zealand does not have a cycle parking standard and the Australian Standard AS2890.3 *Bicycle Parking Facilities* [2] has substantial gaps. For additional information, readers are encouraged to refer to the Austroads research report *Bicycle Parking Facilities: Guidelines for Design and Installation* [3].

1.1 Why cycle parking?

Central and local government are investing in cycling as a transport choice, creating bicycle lanes and other infrastructure in public spaces.

Private and commercial design and development should reflect the changing transport patterns and demand for cycle parking that results from this investment.

Cycle parking is much more space efficient and affordable than car parking. Ten or more cycles can fit in the same space as one car.

Cycle parking is now required by many councils under District Plan rules. Although supply rates differ, cycle parking should be considered as essential as car parking.


E-scooters are also putting pressure on cycle parking capacity in some NZ cities. More scooter and cycle parking is likely to be required as scooters and other low-powered devices grow in popularity.

Key principles

Good cycle parking is:

1. Appropriate for different trips and groups (Figure 1)
2. Sufficient in quantity to support expected demand for cycling as an active transport mode (section 2).
3. Of high-quality design and installation (section 3).
4. Located in safe, convenient and accessible locations, close to the destination of the user (section 4).
5. Suited to different types of cycles, including cargo cycles, trikes and e-bikes (section 4.2).
6. Well managed and maintained (section 5).

Cycle parking needs to cater for short or long stay users, or both.

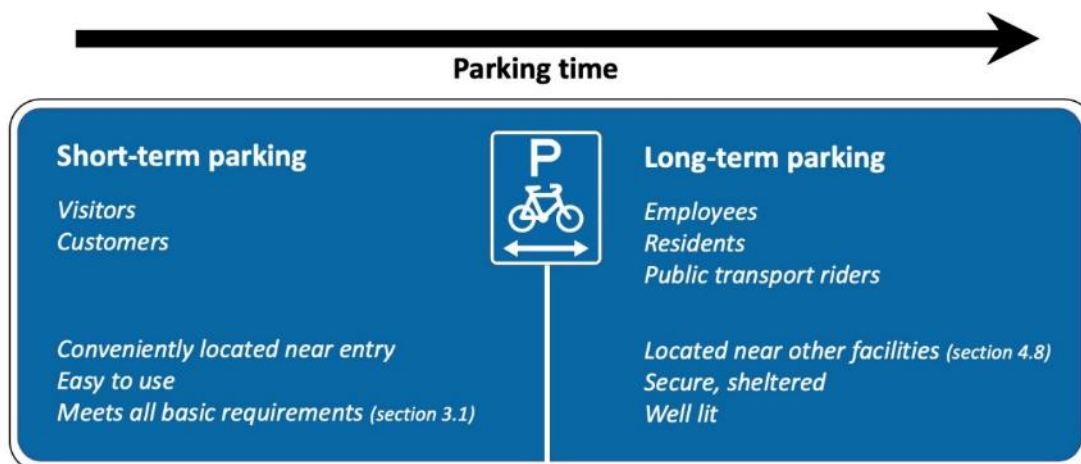

1.2 Key steps in cycle parking provision

The steps in providing cycle parking begin with assessing the existing supply of cycle parking and deficiencies that have been advised by the public, specific stakeholders, or through field audits. For councils, conducting an initial survey and putting the data into RAMM and/or GIS is a key preliminary step. Residential and commercial developers and managers may be able to skip to the planning stages shown in Figure 1.

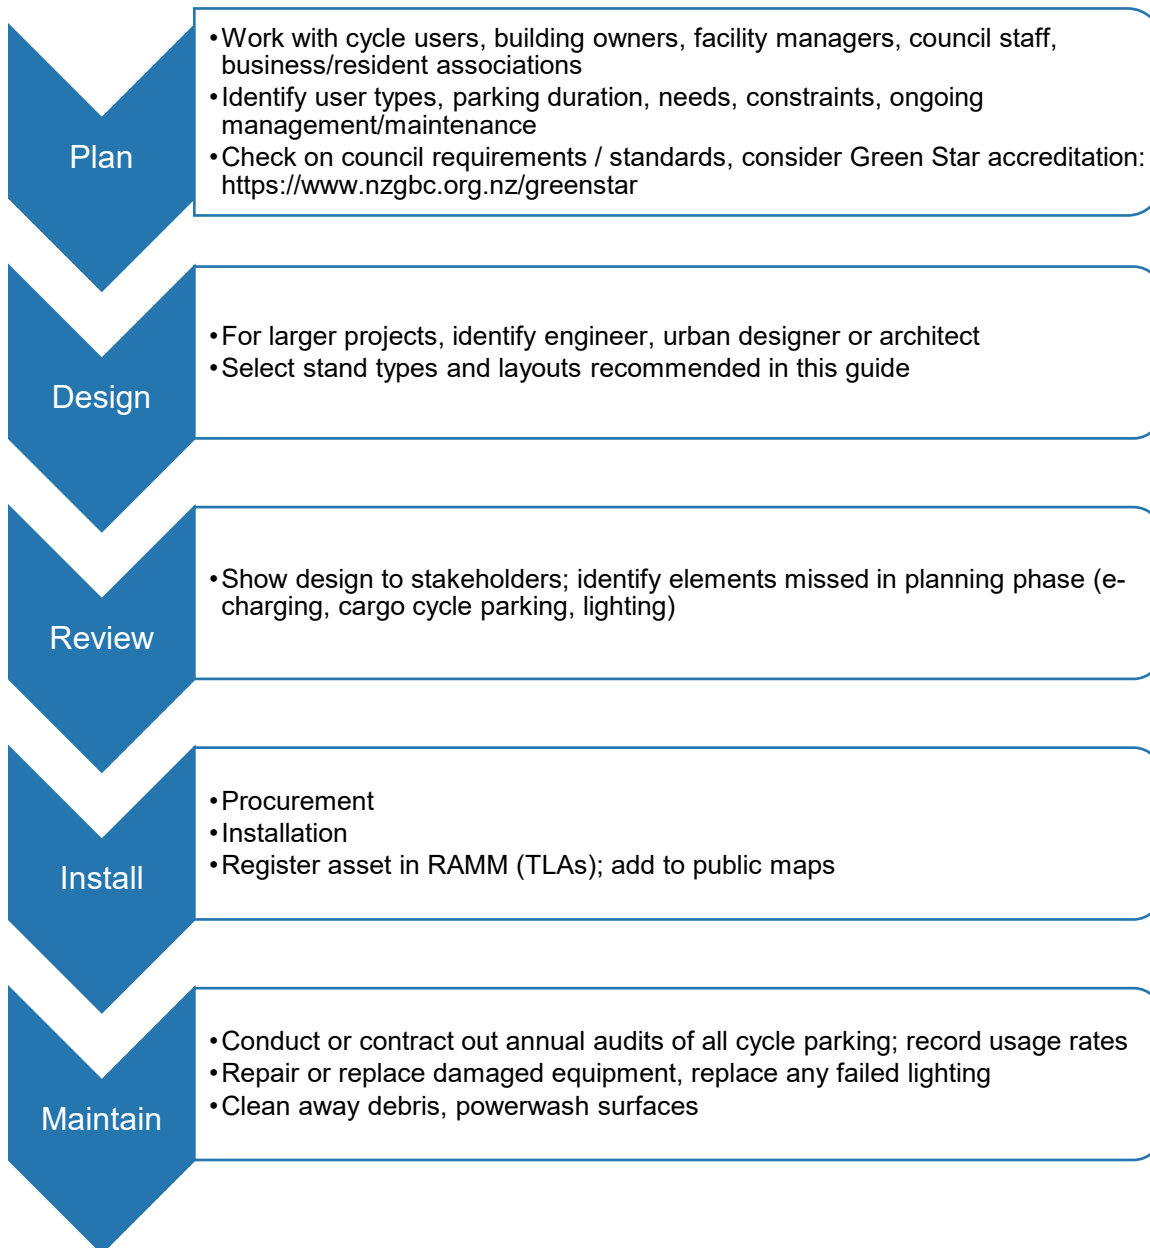


Figure 1: steps in providing cycle parking

2 PLANNING GUIDANCE

When determining the amount of cycle parking to provide there are a number of aspects to consider. There may be a District Plan minimum requirement that will be applicable where a development requires consent. However, these requirements may also help give an idea of quantity needed even if no consent is being sought. Appendix 1 provides examples of current district plan cycle parking requirements from three New Zealand jurisdictions of various population and cycling mode share.

District Plan requirements are generally a 'minimum'. Consider any projected increase in cycling due to new and improved cycleways or other system changes. Future-proofing the cycle parking provision will ensure that space is allocated at the design stage (even if some parking facilities are not built immediately), rather retro-fitting later.

In addition to District Plan requirements, visiting similar land use activities to observe or survey the demand for cycle parking may help assess the number required. Depending on the nature of the activity, the survey may need to be undertaken at various times of the day or week, to see whether there are more short-term visitors throughout the day or more tidal patterns with people generally arriving in the morning and leaving in the afternoon. Consider that demand may be suppressed due to factors such as weather, holidays, adjacent construction, or poor existing network accessibility.

Note that schools with a Bikes in Schools track and/or cycle skills training programme are likely to have significant demand for bicycle parking.

Basic planning principles

- Set supply rates based on targeted cycling mode share, not historic data.
- **All** activities should provide cycle parking. For small developments even the provision of two inverted U stands with room to add more later ensures that people who cycle are catered for.
- Minimum requirements should be consistent with city or regional targets for cycle mode use. Where local targets do not exist, a general target of 10% cycle mode share in urban areas can be used.
- Separate staff/resident and customer/visitor cycle parking supply rates and facilities are required, and the provisions should reflect the different needs of short/long stay users.
- End-of-trip facilities for staff should include sufficient showers and lockers, with an allowance for use by non-cycling staff. Drying facilities should also be considered.
- Medium to high density residential developments that are/were subject to car parking requirements should also be subject to cycle parking requirements for both residents and visitors.
- Where a residential development excludes on-site car parking, demand for on-site secure cycle parking for residents and visitors may be particularly high.
- If minimum rates cannot be met on site, cash developer contributions to fund public cycle parking nearby should be considered.
- Convenient placement is critical. Public bike parking should be no more than 25m from the entrance to key destinations; otherwise riders may seek closer informal parking places.
- Endeavour to have supply exceed peak demand by 10-25%.

3 CYCLE STANDS

3.1 Six key design requirements

A cycle stand should:

1. **Support the cycle frame**, not only the wheel, with more than one point of contact. This means it won't roll away or be knocked over, damaging the cycle and causing a trip hazard.
2. **Be secure and enables secure locking**. Opportunistic thieves may steal any part of the cycle that isn't locked. Stands should be securely attached to the ground and enable, if desired, locking of frame and wheels with a rigid 'D-lock', a cable lock or both.
3. **Be safe for all users and cycles**. Cycle parking should not cause injury or obstruction for pedestrians, staff or cycle users, or damage cycles. Suitable cycle parking:
 - Should not create glare – stainless steel should have a brushed finish.
 - Should be visible / detectable by vision impaired (or inattentive) pedestrians – use colour that contrasts with the surroundings and a horizontal element near ground level.
 - Should not have sharp edges that could injure someone or damage the cycle finish.
 - Should meet the minimum dimensions for size and spacing (refer section 4.2).
4. **Work for many types of cycles**; including cargo, e-bikes, mobility trikes, children's cycles.
5. **Work for users of all ages and abilities**. Users may not have the strength or height to lift cycles, especially heavier e-bikes. Alternatives to wall-mounted / multi-tier cycle parking should be available. Smaller stands or mid-level rails should be provided for children's cycles.
6. **Look and work like cycle parking**. There are some great artistic and decorative options, but functionality and safety are essential. It needs to look like parking for cycles.

3.2 Preferred stand type: the inverted U or hoop

An inverted U, (also known as a hoop, staple, Sheffield) is a highly functional stand design and is the recommended type for most applications. An inverted U has slight curvature at the top corners and a hoop has a continuous curve. These stands are typically 0.8m high and 1.0m long (refer section 4.2).

A crossbar or similar element that visually impaired persons can detect with a cane should be provided at least on the end stand or wherever the stand is immediately adjacent to the pedestrian through zone [2]. To be detectable by a person with a cane, the crossbar needs to be within 150mm of the ground surface [5]. Higher crossbars may not be detected by a visually impaired person but do enable the locking of children's and "step-through" style bicycles as well as stabilising the front wheel.



Figure 2: hoop stands, Christchurch (J. Lieswyn)



Figure 3: inverted U with crossbar (Bikes Welcome)

3.3 Acceptable alternative stand types

Alternatives to the inverted U stand may be acceptable, providing the basic requirements are met.

Custom stands almost always have sharp edges that can damage paintwork. If the edges are wooden (Figure 4) then this risk is lessened.

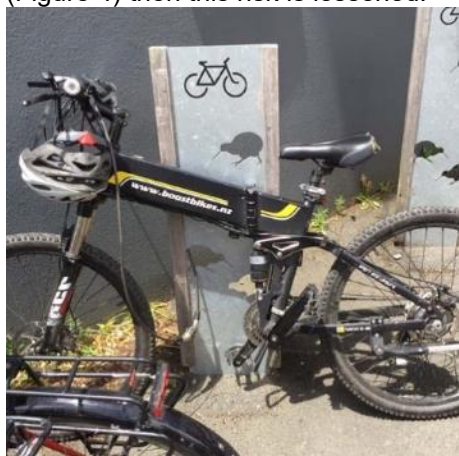


Figure 4: laser cut custom stand (Bikes Welcome)

Sign-posts are ubiquitous elements of the streetscape and often used by cyclists when there is no better alternative. However, a thief has only to pull the post out of the ground (or lift the bike over the top of a small sign) to abscond with the cycle. By welding a **sign-post hoop** (Figure 6) onto the post, security is improved. If the hoop is not welded, tamper proof hardware is required. Ideally the hoop should be at least 0.6m wide and there may be a risk of a cycle parked on the kerb side being hit by a passenger opening a car door.



Figure 6: sign-post mounted hoop (Bikes Welcome)

The classic **bicycle shape stand** (Figure 5) is another popular type with an immediately obvious function. This style is used in several NZ cities.



Figure 5: bicycle shape stands, Hastings (J. Lieswyn)

In contrast to the simple custom stand, the **art stand** (Figure 7) takes many forms and each one is usually a unique artwork.

In this example, the key shaped stand is not long enough to provide support for cycles that do not have a kickstand and has sharp edges that can damage paintwork. The lock shaped stand meets the six key requirements, including multiple points of contact.



Figure 7: artistic stands (Bikes Welcome)

Simple **galvanised pipe rail stands** (also known as “triathlon racks” can be portable and used as temporary **event stands** or at cafes where road cyclists frequent in large numbers (Figure 8). As the cycle must be lifted, they are not ideal for heavier cycles. They should only be used where there is passive surveillance nearby.



Figure 8: pipe rail stand with pump at a cafe, Christchurch (J. Lieswyn)

The **two-tier rack** (Figure 10) is a space-saving design useful in high-demand situations where space is limited, (refer section 4.6). The design should include a ‘lift assist’ mechanism or be weighted so that rolling a bike on automatically lifts the bike, and signposted instructions for use. Lower quality racks are harder to use and don’t get as much use on the top tier.



Figure 10: two tier parking, Grey Street, Wellington (J. Wratt)

A **portable inverted U** (Figure 9) is welded to a floor rail and is made of lightweight alloy. Because it is easy to cut, such stands are best used for events with plenty of passive surveillance.



Figure 9: portable stand, Palmerston North (J. Lieswyn)

Hitching rails mounted to a wall can provide an adequate support and locking point for short stay parking. They are particularly useful when there is insufficient path or frontage space for the preferred inverted U design. The rail in Figure 11 is mounted 75mm (centre of rail) to the wall; a dimension of 200mm allows for wider handlebars and easier use of a D-lock.



Figure 11: hitching rail, Christchurch (J. Lieswyn)

3.4 Unacceptable stand types

A **slot stand** (also called a “wheel-bender”) is any stand that supports the cycle only by a single wheel. Some do not accept wider tyres. With no support for the frame, the cycle may be inadvertently knocked over, buckling the wheel. They require a long (and easily cut) cable lock to secure the frame.



Figure 12: slot stand, Christchurch (ViaStrada)

A “**toast**” or “**wave**” style rack (Figure 13) has a higher vertical element but doesn’t have two points of contact with the cycle and therefore is an inadequate support. Although typically designed for bikes to straddle the low parts perpendicularly, riders may elect to secure their bike side-on instead, thus blocking a large section of it.



Figure 13: wave stand, Palmerston North (J. Lieswyn)

Compact stands, also known as staggered height stands (Figure 14) are similar to “wheel-benders” but have a higher bar for support and locking purposes. Such stands offset cycles by raising the front wheel of every other cycle so that the handlebars are separated vertically. Theoretically, this means that the spacing of main locking bar can be reduced (to 750mm from the typical 1.0m), increasing the cycle parking capacity of a given area. Compact stands are therefore popular in public transport facilities and at some universities. However, a reduced spacing makes it difficult to reach between cycles for locking or accessing luggage panniers. The complex tangle of tubes at ground level tend to attract and retain debris and leaves. Many cargo cycles can only fit at the ends, which may already be occupied. The handlebar of a cycle being pulled out from a lower rack can damage the control cables of an adjacent cycle. For these reasons, compact stands are not recommended.



Figure 14: compact stand, Christchurch (J. Lieswyn)

There are many other unacceptable cycle stand variants. Refer to Austroads *Bicycle Parking Facilities: Guidelines for Design and Installation* and/or the Bikes Welcome website [6] for more examples.

3.5 Materials and specifications

The main considerations are durability, maintenance time and cost, non-damaging to cycles or people, and fit with the local environment. In the New Zealand climate, UV stability and corrosion resistance are key considerations.

Table 1: stand materials and durability

<div> <div>Most durable</div> <div>←</div> <div>→</div> <div>Less durable</div> </div>			
Stainless steel – marine grade 316	Thermoplastic or rubber coated steel	Powder coated double dip galvanised steel	Zinc galvanised steel

For more information on stand materials and coatings refer to Essentials of Bicycle Parking (APBP) or Austroads (2016). Use these specifications as guidance to help choose a supplier and specify stand requirements. Always talk to the supplier about where the stand will be located to ensure the stand supplied and proposed installation are suitable.

Table 2: component specifications (adapted from the Cambridge Cycle Parking Guide)

Tool resistance	All parts of the stand used for locking the cycle must withstand cutting by a 300mm, 24tpi hacksaw, at a rate of 1 stroke per second, for a minimum of 120 seconds.
Tube size	50-75mm diameter tubing
Thickness of tube wall	2.5mm minimum
Base plate	150x150x6mm base plate welded to stand if bolted to surface or a base plate at the base of in-ground posts will help prevent it being pulled out.
Minimum service life	20 years (for asset management purposes)

Cycle parking stands are typically either surface mounted or embedded in concrete footings. Variations on these methods and common specifications are provided in Table 3.

Table 3: cycle stand installation specifications

Method	Variations	Typical applications	Typical specifications
Bolts (surface mount)	Stands are individually affixed to the floor with bolts and masonry anchors: easy to replace or relocate, but less secure and durable than other methods	Parking structures, buildings or cycle parking cages	Fixing hardware should be tamper-proof high security bolts of M10 minimum size; two or more per stand leg For outdoor applications, ensure all fixing hardware is the same material as the stand to avoid galvanic corrosion
	Stands are bolted to a floor rail, reducing the number of floor anchors required; easy to replace or readjust spacing		
Concrete footing (inground)	Stands are fitted to a concrete-embedded sleeve with tamper-resistant hardware	On-street corrals or kerb-less shared streets where stands are more likely to be damaged by motor vehicles	Each jurisdiction is likely to provide the requirements for a concrete embedment. Austroads (2016) cites Sydney's 350mm post depth in a 450mm diameter, approximately 600mm deep footing [3] Christchurch does not specify post depth, but calls for a 250mm diameter, 600mm deep footing [7] Do not use quick-set concrete because it tends to swell and buckle the pavement
	Stands are directly embedded in the concrete footing: most secure but more difficult to replace or relocate	Public open spaces and street furniture zones of footpaths	

4 LAYOUT AND DESIGN

4.1 Location of cycle parking

Table 4 lists a range of factors that should be considered when siting cycle parking.

Table 4: cycle parking location best practices

Easy to find and access	<p>Visitor cycle parking facilities should be clearly signposted or visible to cyclists entering the site. It is important that the location is in the direct line of travel (see “proximate” below).</p> <p>Preferably a location that can be ridden to and also provide convenient and safe access from surrounding cycle routes and main entry points.</p> <p>Surface markings work well to direct users to cycle parking and provide a clear route.</p>
Pedestrian safety	<p>Consider the safety of mobility or vision impaired pedestrians. Locate stands so that parked cycles do not block the pedestrian path. This may be off the footpath or in the ‘street furniture zone’.</p>
Protected	<p>Cycle parking facilities should be located so that the cycle is at no risk of damage from vehicle movements within the site.</p>
Unobstructed	<p>Cycle parking facilities should be available during the hours of operation and shall not be diminished by the subsequent erection of any structure, storage of goods, or any other use.</p>
Proximate	<p>Cycle parking facilities should be located as close as possible to and no more than 25 metres from at least one main pedestrian public entrance to the building/activity. An exception could apply to a building on a key pedestrian frontage that has no setback from the road frontage, which results in there being no space for the visitor cycle parking within 25 metres of the main entrance.</p>
Security and safety	<p>As per Crime Prevention Through Environmental Design (CPTED) principles, avoid obscured locations where anti-social and/or criminal activity can occur. The location should enable adequate surveillance (passive or electronic) and/or physical security so as to deter and prevent cycle theft and assure personal safety.</p> <p>Security measures may include: CCTV cameras, location in well trafficked / highly visible locations, close to on-site security, locked/restricted access (e.g. cycle parking cages).</p>
Lighting	<p>Cycle parking areas should be well lit for theft protection, personal security, amenity and accident prevention.</p>
Weather protection	<p>Cycle chains and other components can rust quickly. Some e-bikes are susceptible to damage from heavy rain. Use an existing overhang, covered walkway, or construct a canopy or roof — either freestanding or attached to a building.</p>
Contour / Slope	<p>Cycle parking should be placed on level ground. Where this cannot be achieved, consider aligning the stands parallel to the contours so that cycles do not roll downhill.</p>
Appeal	<p>Attractive, obvious, clean and well-maintained cycle parking will deter anti-social behaviour, and make users feel safe and welcome.</p>

4.2 Site design: spacing and layout

An **envelope** is the space around a parked bicycle. Figure 15 (next page) presents envelopes, typical stand dimensions, and layouts for narrow and wide footpaths, with and without kerbside car parking, on-street corrals, and inside buildings. A 0.2m **spacing** between parallel stand envelopes is desirable. For standard inverted U stands (or similar), the spacing between stands should be at least:

- Standard cycles: 1.0m minimum; 1.2m to meet Australian Standard 2890.3 [2]
- Cargo bikes and trikes: 1.5m minimum, 1.8m desirable. If there is not enough space for an entire row of such stands, then the stands on each end of a row should be spaced more widely

There is often a need to provide **clearance** around the stand (and cycle envelope) for:

- Car doors (where stands are in the street furniture zone adjacent to parallel parking)
- A person to move around the cycle to lock or unlock it, or to access luggage panniers/cargo

When a stand is parallel to an external or internal building wall, there will usually be a need for 1.0m of clearance between the stand and the wall (0.5m for the cycle envelope and 0.5m for a person). No clearance around the cycle envelope is required if the stand is perpendicular to a wall, or a kerb without adjacent car parking. The spacing to a wall or kerb should be adjusted for these clearances and the angle of the stand as per Table 5.

Table 5: Minimum distance (in metres) from centre of stand to a wall or kerb

	Orientation				
	Parallel				Perpendicular
	0°	22.5°	45°	67.5°	90°
With clearance	0.9	1.0	1.1	1.2	1.3
Without clearance	0.5	0.6	0.7	0.8	0.9

The minimum **aisle width** for manoeuvring cycles to/from parking, per Australian Standard 2890.3 should be 1.5m. Allow 2.0m for multi-tier parking or cycle lockers. The Cambridge Cycle Parking Guide [8] provides a complete set of turning paths for setting out indoor parking and the Christchurch City Council District Plan has a simple turning path diagram [9].

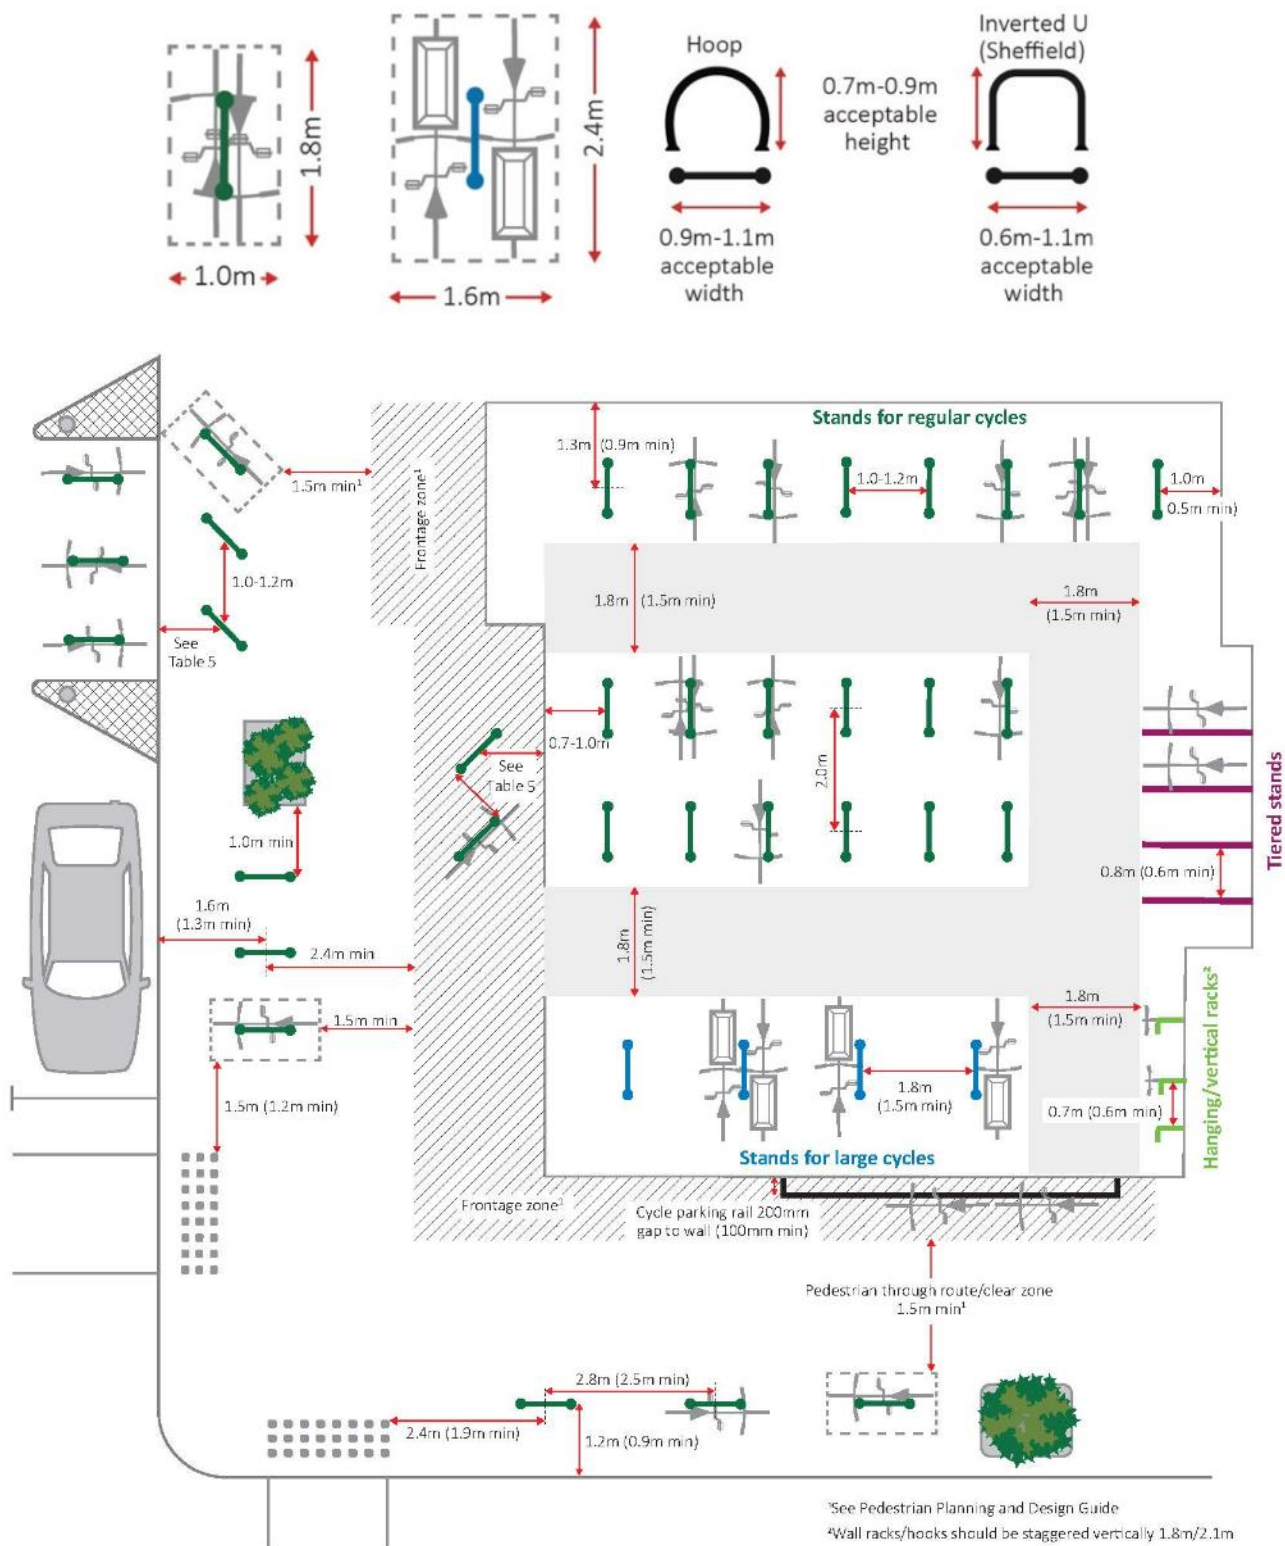


Figure 15: Cycle parking envelopes, typical stand dimensions and layouts

Note that all dimensions are based on cycle envelopes and a 1.0m long cycle stand. Adjust if using different stands or if providing for different types of cycles. Where a range is given, the upper value is preferred for ease of use, and the lower value may be used if space is limited and/or greater capacity is required.

4.3 Parklets and cycle corrals

A parklet is on-street car parking space re-purposed for any combination of café seating, landscaping, and cycle parking (often on a portable base). A cycle corral is a marked space in the carriageway with cycle stands. Cycle parking in the street should be clearly delineated with vertical elements that are high enough to be seen by a reversing motorist through the rear-view mirror and/or kerb extensions.



Figure 16: relocatable covered cycle parklet, Palmerston North (J. Lieswyn)



Figure 17: cycle corral, Wellington (G. Koorey)

4.4 Covered cycle parking

Covered cycle parking (Figure 10 on page 9) provides rain and UV protection and helps define the cycle parking area. Unlike an enclosed or indoor parking, there is no added security beyond the rider's own locks. Such parking may utilise any acceptable stand type.

4.5 Lockers

A secure locker designed to accommodate a single cycle is a good long-stay cycle parking option particularly for transit hubs.

A visually permeable design is better for crime prevention, best suited to drier climates and indoor areas. Mostly solid sides are better for rainy climates, but some cross ventilation helps dry raingear that has been hung over the bike.

There are numerous access control choices, including coin-operated locks and subscriber keys/cards. Compared to enclosures, separate lockers are more costly and require more space per cycle.



Figure 18: partially permeable locker, Bielefeld Germany (A. Wilke)

4.6 Enclosures and indoor parking

NB: See section 4.2 for specific layout parameters.

Cycle parking cages, sheds or spaces within a building are provided for commuters, residents of multi-family or apartment buildings, and public transport riders. They should:

- Have power supply for charging e-bikes
- Have secured access with combination or electronic access restricted to permitted users; sliding gates or doors should be motor-actuated for ease of use with automatic closure; a manual door release on the inside is required for safety
- Have security cameras if the area in or around the enclosure is public
- Not use chain mesh for a surrounding security layer, as it is easily cut
- Ideally be located close to a changing area with lockers (or include them on-site)
- Perhaps require users to sign a contract to ensure they understand their obligations (e.g. what constitutes abandonment, security procedures, etc) or include signage to communicate this



Figure 19: enclosure with swipe card access, motorised gate, and security cameras, University of Canterbury (G. Koorey)



Figure 20: indoor cycle parking with motorised sliding doors and e-bike charging at the Christchurch bus exchange (J. Lieswyn)

Within the enclosed space, vertical hooks or wall racks may help increase capacity and control internal parking at relatively low cost. If public access is possible, ensure the cycle can be securely locked to the wall by providing a locking point. The hooks need to be wide enough to accommodate fat tyres, appropriately spaced, and mounted at suitable heights, to suit the range of cycles expected (e.g. road, commuter, mountain, hybrid). For example, after three iterations the Greater Wellington Regional Council cycle shed has hooks that are:

- 100 mm wide, with 110 mm entry gap, angled approximately 35 degrees downward from the horizontal, for strength and ease of hanging.
- Covered with a polyurethane sheath to avoid damage to rims, spokes and valves.
- Mounted at alternating heights of 1.8 and 2.1 m, with 550-650 mm between hooks.



Figure 21: wall hooks, GWRC (S. Kennett)

4.7 Signage

Cycle parking signage should be incorporated in cycle parking facilities in order to promote the presence of the parking and to define the parking area (markings or different paving may also suffice). The standard sign to indicate cycle parking is defined in the Traffic Control Devices Manual [10] and illustrated in the sign specifications [11].

Class restricted cycle stand				
Variation	Standard	Right arrow	Left arrow	Dual arrow
Code	PP2	PP21		
Rule	R6-52	R6-52.1		
Components	R6-1C-2C	R6-1C-4		
MOTSAM	RP-9	RP-9.1		

Figure 22: class restricted cycle sign

Instructional signage may be required if providing multi-level racks, wall hook parking or secured access. Signs can also cover abandoned and lost property policies.

Wayfinding signage. When cycle parking has been well located, it should not require signage to find it. However, directional signage may be needed at large sites such as town centres, shopping malls and bus stations in order to direct cyclists to secure cycle parking. It should enable a first-time visitor to easily locate the cycle parking regardless of their approach direction or entry point. Maps with cycle parking marked, painted lines or lanes can assist way-finding.

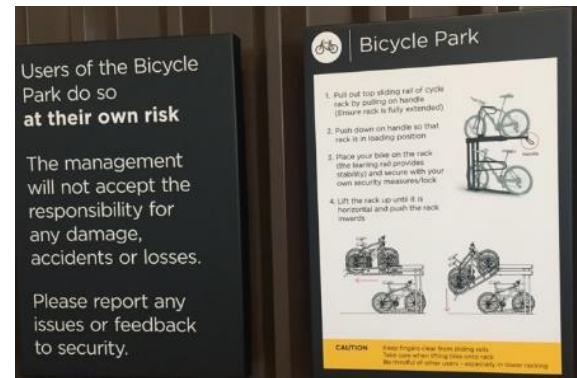


Figure 23: for multi-tier racks, provide signs to explain use, Christchurch (J. Lieswyn)



Figure 24: clear sign for enclosed cycle parking (Bikes Welcome)

4.8 Lighting

Where parking is at a destination that is located internally or has longer than daylight hours of operation, the parking should be well lit artificially. Consult the NZ Building Code requirements for artificial light (clause G8) for acceptable solutions.



Figure 25: lighting at extended hours locations, Huia pool, Hutt City (Bikes Welcome)

4.9 Complementary end-of-trip facilities

Tool stations typically include a bar to hang the cycle while making quick repairs, and a set of tools hanging from stainless steel braided cables inside the post (Figure 26). A pump with a universal valve head is secured in an adjacent post. The pump will need to be serviced one to four times per year depending on usage. Although secured with stainless steel cables, tools are occasionally stolen or damaged and require periodic replacement. Airports can provide tool stations with signs and pavement marking to establish a cycle assembly area ideal for tourists arriving or departing with their own cycle. Commuters and airport employees who ride may also find the tools and pump handy. Christchurch, Nelson and Rotorua airports have such assembly areas.



Figure 26: tool station, High Street Christchurch (J. Lieswyn)

Showers and changing areas are important for every building. A best-practice facility is located between the secure parking area and the public areas (e.g. elevators or lobby / reception spaces) and includes:

- Clotheslines or hooks to hang gear to dry on
- Towels
- Hair dryers and hair straighteners
- Noticeboard
- Iron and ironing board
- Lockers for clothing, towels, toiletries
- Optionally a drying room for wet gear

Cycle lockers and/or baggage lockers are needed at workplaces and transport interchanges, as modern cycles have numerous detachable items such as seats, lights and pannier bags but no lockable space in which to store them (refer section 4.5).

E-bike charging. Most e-bikes have sufficient range so that charging away from home is not necessary, but when the building is located in outlying areas (e.g. airports, remote business parks) or commuters ride from an outlying area, charging points may be needed.

4.10 School cycle parking

Traditionally, many New Zealand schools provided bike sheds for weather-protected parking. In recent decades, the provision of quality cycle parking has declined in parallel with a decline in cycling to school. As this trend is reversed through upgraded cycleways in the neighbourhood and/or Bikes in Schools tracks, schools should provide fit-for-purpose cycle parking to support students and staff who are getting back on their bikes.

For new schools, cycle parking for students and staff should be considered at the same time as car parking and site access – not as a minor component of a landscaping plan. Existing schools may take advantage of other campus improvements to upgrade cycle parking at the same time.

Covered parking helps protect rubber components (tyres, handgrips, seats) from UV damage and keeps rain from rusting brake cables, fasteners and chains. School cycle parking should comply with the planning and design guidance of this technical note, including stand types and aisle widths.

Many bikes ridden to primary and intermediate schools will often be small size but relatively heavy for the child using it, so large racks and solutions that involve lifting the bikes should be avoided. Separate scooter parking (Figure 27) should also be considered. This can be a simple wall rack with hanging cables for locking, or a more substantial rail stand.



Figure 27: scooter stand, Wellington (A. Wilke)

School travel plans typically include an audit that can reveal infrastructural barriers to walking and cycling to school. If cycle and scooter parking is prominent, weather protected, and first class, then students are given the impression that active travel is a valued travel choice. If it is insecure, dirty, and cramped, then youth may get the impression that cycling is a second-class way to travel.

5 MANAGEMENT AND MAINTENANCE

Councils and large institutions should keep an up-to-date inventory of cycle stands and other facilities. For road controlling authorities, this will usually be within the scope of Road Assessment and Maintenance Management (RAMM) systems. Councils should consider publicising the location of cycle parking through existing public-facing integrated transport or cycling-specific maps online.

A network or campus-wide inspection should be conducted at least annually. The elements of the audit should include:

- Condition: identify any damaged or corroded stands for replacement; tighten hardware if necessary.
- Cleanliness: assess whether the cleaning regime is sufficient. Periodic cleaning of cycle stands is especially important for stands that are floor mounted on a rail where debris can be trapped. A clean floor helps users keep their clothes clean if they must kneel (e.g. when locking their cycle).
- Occupancy survey. Stands that appear to have no cycle parking activity should be programmed for one or two more surveys to confirm the finding, and after consultation with nearby stakeholders could be relocated. Sometimes, problems preventing usage (inadequate lighting, security, or wayfinding) can be rectified to encourage use rather than relocating the stands. Those that are full or near-full should be augmented.
- Removal of abandoned cycles, locks and other property.

Councils and large institutions can also support cycling by helping educate riders. Auckland Transport has a web page dedicated to cycle parking including tips on how to lock your cycle securely and how to record the serial number in the event of theft [12]. London has a Cycle Security Plan focused on minimising theft through site design, education, and enforcement [13].

6 REFERENCES

1. NZ Transport Agency. *Cycling network guidance - planning and design*. undated September 2018 [cited 2018; Available from: <https://www.nzta.govt.nz/walking-cycling-and-public-transport/cycling/cycling-standards-and-guidance/cycling-network-guidance/>
2. Standards Australia, 2015, *AS 2890.3 - 2015 Parking facilities - Part 3: Bicycle Parking Facilities*.
3. Barber, H., et al., 2016. Austroads research report 527: Bicycle Parking Facilities: Guidelines for Design and Installation, Austroads. <https://austroads.com.au/publications/active-travel/ap-r527-16>
4. Association of Pedestrian and Bicycle Professionals (APBP), 2015. Essentials of Bicycle Parking. <https://www.apbp.org/page/publications>
5. NZ Transport Agency, 2009. Pedestrian planning and design guide. <http://www.nzta.govt.nz/resources/pedestrian-planning-guide/>
6. Bikes Welcome, undated. Bike-friendly businesses and great parking. <https://www.bikeswelcome.org/>
7. Christchurch City Council, 2017. Construction Standard Specifications Part 6 Roads. <https://www.ccc.govt.nz/assets/Documents/Consents-and-Licences/construction-requirements/CSS/17-396520-CSS-amendment-V-10.1-310317-Part-6-Roads-10th-2017-final-web.PDF>
8. Transport Initiatives and Cambridge City Council, 2010. Cycle Parking Guide for New Residential Developments. https://www.cambridge.gov.uk/sites/default/files/docs/CycleParkingGuide_std.pdf
9. Christchurch City Council, 2010. District Plan Appendix 7.5.2 Cycle parking facilities. <https://districtplan.ccc.govt.nz/pages/plan/book.aspx?exhibit=DistrictPlan>
10. NZ Transport Agency, 2007, *Traffic Control Devices Manual*, NZ Transport Agency. <https://www.nzta.govt.nz/resources/traffic-control-devices-manual/>
11. NZ Transport Agency, undated. Sign specifications. <https://www.nzta.govt.nz/resources/traffic-control-devices-manual/sign-specifications/>
12. Auckland Transport, undated. Bike parking and gear storage. <https://at.govt.nz/cycling-walking/advice-support/bike-parking-gear-storage/>
13. Transport for London, 2010. Cycle Security Plan. <http://content.tfl.gov.uk/cycle-security-plan.pdf>

APPENDIX 1: EXAMPLE DISTRICT PLAN CYCLE PARKING AND END OF TRIP FACILITY REQUIREMENTS

The following table presents example cycle parking requirements from three New Zealand jurisdictions. Local conditions and topography will have a substantial impact.

To present the information concisely, some text has been omitted. The source district plans should be consulted if in doubt. These are a starting point for consideration when developing or revising requirements.

Activities that are not well covered by these plans include parks and public transport stations, both of which can be major cycle parking demand attractors.

Central city cycle parking demand is typically higher than suburban locations. The Christchurch District Plan has different cycle parking rates for the central city and outside the central city. For simplicity, this table includes the rates outside of the central city only. Refer to the District Plan directly for central city rates.

	Large City – Low to med cycle mode share (Auckland)		Medium City – Med cycle mode share (Christchurch)		Town – Semi rural – low cycle mode share (Rangiora)	
Activity type	Visitor	Long Stay	Visitor	Staff/residents/student	Visitor	Long Stay
Food and beverage	Up to 350m ² GFA: Nil required Greater than 350m ² GFA: 1 per 350m ² GFA	1 per 300m ² GFA	1 per 300 m2 PFA	1 per 100 m2 PFA (2 min.)	1 per 250m ² net floor area	1 per 100m ² net floor area
Other retail and commercial activities	Up to 500m ² GFA: Nil required Greater than 500m ² GFA up to 5000m ² GFA: 1 per 500m ² GFA Greater than 5000m ² GFA: 1 per 750m ² GFA	1 per 300m ² GFA of office	Commercial Services: 1 per 500 m2 GFA Factory shops: 1 per 1000 m2 GLFA Service stations: 1 per 1000 m2 GLFA Other retail: 1 per 300 m2 GLFA	Commercial Services: 1 per 200 m2 GFA Factory shops: 1 per 750 m2 GLFA Service stations: 1 per 750 m2 GLFA Other retail: 1 per 750 m2 GLFA	General retail: Except for sites with frontage to a principal shopping street, 1 per 500m ² GFA Supermarket: 1 per 500m ² GFA Large format retail: 1 up to 500m ² GFA plus 1 per 1000m ² GFA thereafter	General retail: Except for sites with frontage to a principal shopping street, 1 per 500m ² GFA Supermarket: 1 per 5 FTE employees Large format retail: 1 per 1000m ² GFA

	Large City – Low to med cycle mode share (Auckland)		Medium City – Med cycle mode share (Christchurch)		Town – Semi rural – low cycle mode share (Rangiora)	
Activity type	Visitor	Long Stay	Visitor	Staff/residents/student	Visitor	Long Stay
Community facilities Places of assembly Entertainment and recreation facilities	Entertainment facilities: either 1 per 50 seats, or 2 plus 1 per 1500m ² GFA Major recreation facilities: 1 plus 1 per 1000m ² GFA of office and other accessory activities Community facilities: 1 per 200m ² GFA Organised sport and recreational facility: 3 per hectare distributed in groups of 3-5 racks	Entertainment facilities: either 1 per 15 FTE employees or 1 per 1500m ² GFA Major recreation facilities: 1 per 300m ² of office and other accessory uses Community facilities: 1 per 500m ² GFA Organised sport and recreational facility: 1 per hectare	Spiritual activities: 1 per 100 m2 PFA Pools: 1 per 10m ² pool area Sports: 10 per ha pitch area or 1 per 150m ² court area Gymnasiums: 1 per 50m ² GFA Libraries: 1 per 100m ² PFA Museums and galleries: 1 per 200m ² PFA Cinemas and theatres (up to 500 seats): 1 per 30 seats Cinemas and theatres (over 500 seats): 1 per 60 seats Other entertainment /recreation: 1 per 50m ² PFA	Spiritual activities: 10% of visitor requirement Pools: 1 per 500m ² pool area Sports: 5 per ha pitch area or 1 per 500m ² PFA Gymnasiums: 1 per 600m ² PFA Libraries: 1 per 400m ² PFA Museums and galleries: 1 per 1000m ² PFA Cinemas and theatres (up to 500 seats): 1 per screen Cinemas and theatres (over 500 seats): 1 per 60 seats Other entertainment/ recreation: 10% of visitor requirements	Places of assembly: 2 plus 1 per 1000m ² GFA Club houses on sports grounds: 2 plus 1 per 1000m ² GFA Sporting grounds, playing fields: 3 plus 3 per hectare used for the activity Golf courses without a club house: 3 plus 1 per 10 hectares	Places of assembly: Nil Club houses on sports grounds, sporting grounds, playing fields, golf courses without a clubhouse: Nil
Care facilities	Residential care: 1 plus 1 per 30 units/apartments Care centres: 1 plus 1 per 50 people to be accommodated	1 per 10 FTE employees	1 per 50 clients (including a care home within a retirement village)	1 per 30 clients (including a care home within a retirement village)	Residential care home: 2 parks for greater than 20 beds	Residential care home: 1 per 5 FTE employees
Retirement village (excluding a care home within a retirement village)	1 plus 1 per 30 units/apartments	1 per 10 FTE employees	1 per 10 units, for developments with 10+ units	Nil	Not specified as an activity.	Not specified as an activity.

	Large City – Low to med cycle mode share (Auckland)		Medium City – Med cycle mode share (Christchurch)		Town – Semi rural – low cycle mode share (Rangiora)	
Activity type	Visitor	Long Stay	Visitor	Staff/residents/student	Visitor	Long Stay
Other residential activities	1 per 20 dwellings for developments with 20 or more dwellings	1 per dwelling without a garage for developments with 20 or more dwellings	Social housing complex: 1 per 10 units for developments with 10+ units Student hostel accommodation: 1 per 10 beds Other: 1 per 20 units for developments with 20 or more units	Social housing complex: 1 per dwelling without a garage Student hostel accommodation: 1 per 3 beds Other: 1 per dwelling without a garage	Nil	Nil
Industrial activities	1 plus 1 per 750m ² GFA of office	1 per 300m ² GFA of office	Warehousing and distribution: 1 per 2000m ² GFA (1 min.) Trade and yard-based suppliers: 1 per 1000m ² GLFA Other industrial: 1 per 1000m ² GFA	Warehousing and distribution: 1 per 1000m ² GFA Trade and yard-based suppliers: 1 per 750m ² GLFA Other industrial: 1 per 500m ² GFA	Nil	1 per 1000m ² GFA
Offices	Up to 200m ² : Nil required. Greater than 200m ² up to 10,000m ² : 1 plus 1 per 1,000m ² above 1,000m ² . Greater than 10,000m ² : 10 plus 1 per 2000m ² above 10,000m ² .	1 per 300m ² of office	20% of staff requirement (2 min.)	1 per 150m ² GFA	1 per 500m ² GFA	1 per 500m ² GFA
Hospitals	1 per 30 beds	1 per 15 beds	1 per 1000m ² GFA	1 per 300m ² GFA	2 plus 1 per 50 beds	1 per 20 beds

	Large City – Low to med cycle mode share (Auckland)		Medium City – Med cycle mode share (Christchurch)		Town – Semi rural – low cycle mode share (Rangiora)	
Activity type	Visitor	Long Stay	Visitor	Staff/residents/student	Visitor	Long Stay
Other health care facilities	Healthcare services: 1 plus 1 per 10 FTE practitioners Veterinary clinics: nil	Healthcare services: 1 per 8 FTE practitioners Veterinary clinics: 1 per 15 FTE employees	1 per 500m ² GFA	1 per 300m ² GFA	Medical centre: 1 per 3 health professionals	Medical centre: 1 per 5 FTE employees
Guest accommodation	1 plus 1 per 20 rooms/beds	1 per 10 FTE employees	1 per 20 bedrooms	1 per 5 FTE staff 1 per 80 beds	Nil	1 per 10 visitor accommodation units where there is no garage provided
Preschools	Care centres: 1 plus 1 per 50 people to be accommodated	Care centres: 1 per 10 FTE employees	1 per 10 children	1 per 3 FTE staff	1 per 20 children	1 per 3 FTE employees
Schools	1 plus 1 per 400 students and FTE employees	1 per 30 students in Year 1-5 plus 1 per 15 students in Year 6-8 plus 1 per 20 employees. Secondary schools: 1 per 15 students in Year 9-13 plus 1 per 20 FTE employees	1 per 30 students (year 1-8) 1 per 100 students (year 9+)	1 per 7 students (year 1-8) 1 per 5 students (year 9+)	1 per 10 students	1 per 5 FTE employees
Tertiary education and research activities	1 per 800m ² GFA office	1 per 20 FTE students and FTE employees on site at the peak times.	1 per 100 FTE students	1 staff space per 4 FTE staff and 1 student space per 4 FTE students	1 per 10 students	1 per 5 FTE employees

End of trip facilities	Large City – Low to med cycle mode share (Auckland)	Medium City – Med cycle mode share (Christchurch)	Town – Semi rural – low cycle mode share (Rangiora)
Showers	Offices, education facilities and hospitals: <ul style="list-style-type: none"> Up to 500m²: No requirement Greater than 500m² up to 2500m²: 1 Greater than 2500m² up to 7500m²: 2 Every additional 7500m²: 2 	If 1-10 staff cycle parks are required: none required If 11-100 staff cycle parks are required: 1 per every 10 staff cycle parks required If >100 staff cycle parks required: 10 for the first 100 staff cycle parks required + 2 for each additional 52 staff cycle parks required	Nil
Lockers	Offices, education facilities and hospitals: <ul style="list-style-type: none"> Up to 500m²: No requirement Greater than 500m²: changing area with space for storage of clothing 	If 1-10 staff cycle parks required: none required If >10 staff cycle parks required: then 1 per every staff cycle park provided	Nil